


PORTAGANTRY[®] RAPIDE[®] 250-500

- A Beam length
- B Beam adjustment
- C Clear operating span
- D Height to lifting eye
- E Height increment
- F Height to top of beam
- G Width
- H Height to top of roller
- J Folding dimensions

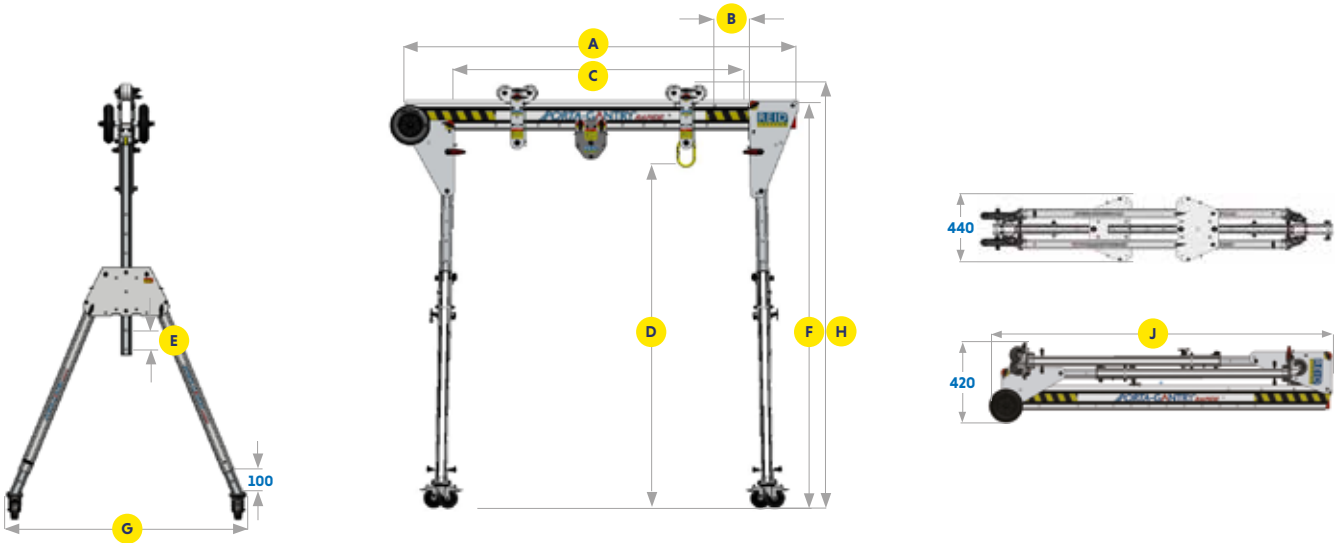

Product Code	Dimensions [mm]													WLL		Unit Weight***	
	A Beam Length	B	CMin	CMax	DMin	DMax	E	FMin	FMax	G	HMin	HMax	J	Goods Capacity [kg]	Fall Arrest Capacity** No of Person(s)	Personnel Positioning** [kg]	[kg]
PGRS20	2000	2 x 200	1100	1500	1450	2050	6 x 100	1776	2376	1158	1856	2456	2080	500	3	250	37
PGRM23	2300	3 x 200	1200	1800	1454	2154	7 x 100	1780	2480	1215	1860	2560	2380	400	2	200	38
PGRT40*	4000	3 x 200	2465	3065	1928	2928	10 x 100	2254	3254	1586	2334	3334	4080	250	1	125	48

*Trolley stops fitted to beam **Ratings using European standards. Contact REID for other standards. *** Weight includes castor inserts.